



## Series 1032

Zetco WaterMarked  
& AGA Approved  
DZR Brass Ball Valve  
BSP Flare x FI

### FEATURES

MANUFACTURED IN ITALY
FULL BORE
WATERMARKED TO ATS 5200.012 LICENCE WMKA00110
AUSTRALIAN GAS ASSOCIATION APPROVAL #5301
BLOW-OUT PROOF STEM
ASSORTED HANDLE COLOURS AVAILABLE
MUST BE OPERATED IN FULLY OPEN OR CLOSED POSITION
ALL VALVES PRESSURE TESTED DURING PRODUCTION
SIZE RANGE: 15MM TO 20MM

### PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -20°C TO 99°C
MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES:
FLUIDS 2500 kPa
FOR RATINGS AT SPECIFIC TEMPERATURES REFER TO GRAPH OVERLEAF
GAS 2100 kPa



AGA 5301



**WaterMark**

LN WMKA00110  
ATS 5200.012


# Series 1032

Zetco WaterMarked & AGA Approved

DZR Brass Ball Valve BSP Flare x FI



## DIMENSIONAL AND COMPONENT DIAGRAM

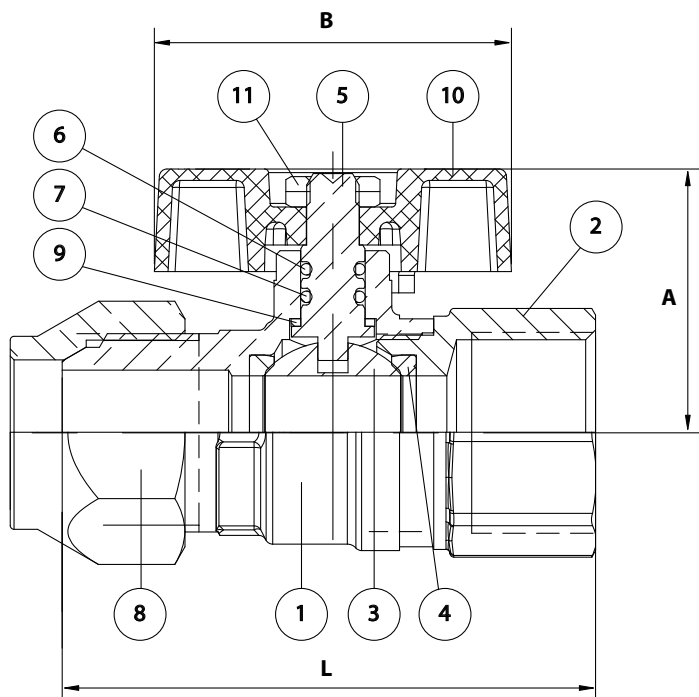

## MATERIALS

POS.	PART NAME	MATERIALS
1	BODY	DZR BRASS
2	END ADAPTOR	DZR BRASS
3	BALL	DZR BRASS (CHROME PLATED)
4	SEAL	PTFE
5	STEM	DZR BRASS
6	UPPER O-RING	HNBR
7	LOWER O-RING	EPDM PEROXIDE
8	NUT	BRASS
9	THRUST WASHER	PTFE
10	HANDLE	POWDER COATED ALUMINIUM
11	NUT	ZINC PLATED STEEL

## DIMENSIONS - mm

Prod. Code	Size	A	B	L	Kv	Wgt kg
1032015	15	30.8	47	63.1	11	0.175
1032020	20	34.7	47	70.2	20	0.280

## PRESSURE/TEMPERATURE DIAGRAM

