



Series 1052

Zetco WaterMarked
& AGA Approved
DZR Brass Ball Valve
F&F T Handle

FEATURES

MANUFACTURED IN ITALY
FULL BORE
WATERMARKED TO AS 5830.1 LICENCE WM-000110
AUSTRALIAN GAS ASSOCIATION APPROVAL #5301
BLOW-OUT PROOF STEM
ASSORTED HANDLE COLOURS AVAILABLE
MUST BE OPERATED IN FULLY OPEN OR CLOSED POSITION
ALL VALVES PRESSURE TESTED DURING PRODUCTION
SIZE RANGE: 6MM TO 25MM

PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -20°C TO 99°C
MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES:
FLUIDS 2500 kPa
FOR RATINGS AT SPECIFIC TEMPERATURES REFER TO GRAPH OVERLEAF
GAS 2100 kPa

BIM-MED^{AUS}



AGA 5301 G
AS 4617




WaterMark

IAPMO WM-000110
AS 5830.1


V.00

Series 1052

Zetco WaterMarked & AGA Approved
DZR Brass Ball Valve F&F T Handle

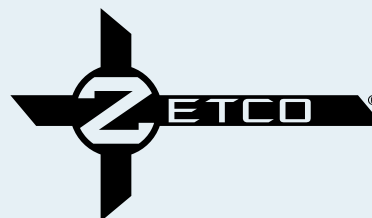

DIMENSIONAL AND COMPONENT DIAGRAM

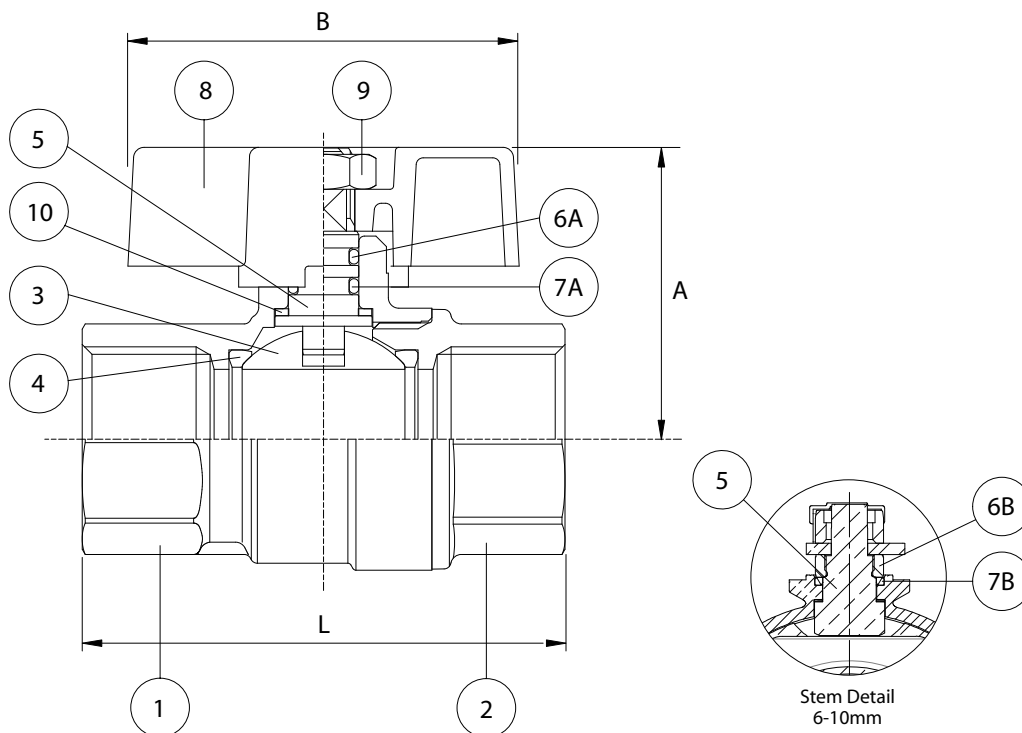

MATERIALS

POS.	PART NAME	MATERIALS
1	BODY	DZR BRASS
2	END ADAPTOR	DZR BRASS
3	BALL	DZR BRASS (CHROME PLATED)
4	SEAL	PTFE
5	STEM	DZR BRASS
6A	UPPER O-RING	HNBR
7A	LOWER O-RING	EPDM PEROXIDE
6B	GLAND NUT	BRASS
7B	CONICAL SEAL	PTFE
8	HANDLE	POWDER COATED ALUMINIUM
9	NUT	ZINC PLATED STEEL
10	THRUST WASHER	PTFE

DIMENSIONS - mm

Prod. Code	Size	A	B	L	Kv	Wgt kg
1052006	6	31	47	46	6	0.130
1052010	10	31	47	50	8	0.125
1052015	15	37	47	60	15	0.179
1052020	20	47	56	69	28	0.298
1052025	25	51	56	83	39	0.471

PRESSURE/TEMPERATURE DIAGRAM

