



## Series 1053

Zetco WaterMarked  
& AGA Approved  
DZR Brass Ball Valve  
M&F T Handle

### FEATURES

MANUFACTURED IN ITALY
FULL BORE
WATERMARKED TO AS 5830.1 LICENCE WM-000110
AUSTRALIAN GAS ASSOCIATION APPROVAL #5301
BLOW-OUT PROOF STEM
ASSORTED HANDLE COLOURS AVAILABLE
MUST BE OPERATED IN FULLY OPEN OR CLOSED POSITION
ALL VALVES PRESSURE TESTED DURING PRODUCTION
SIZE RANGE: 6MM TO 25MM

### PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -20°C TO 99°C
MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES:
FLUIDS 2500 kPa
FOR RATINGS AT SPECIFIC TEMPERATURES REFER TO GRAPH OVERLEAF
GAS 2100 kPa

BIM-MED<sup>AUS</sup>



AGA 5301 G  
AS 4617



**WaterMark**

IAPMO WM-000110  
AS 5830.1


V.00

# Series 1053

Zetco WaterMarked & AGA Approved  
DZR Brass Ball Valve M&F T Handle



## DIMENSIONAL AND COMPONENT DIAGRAM

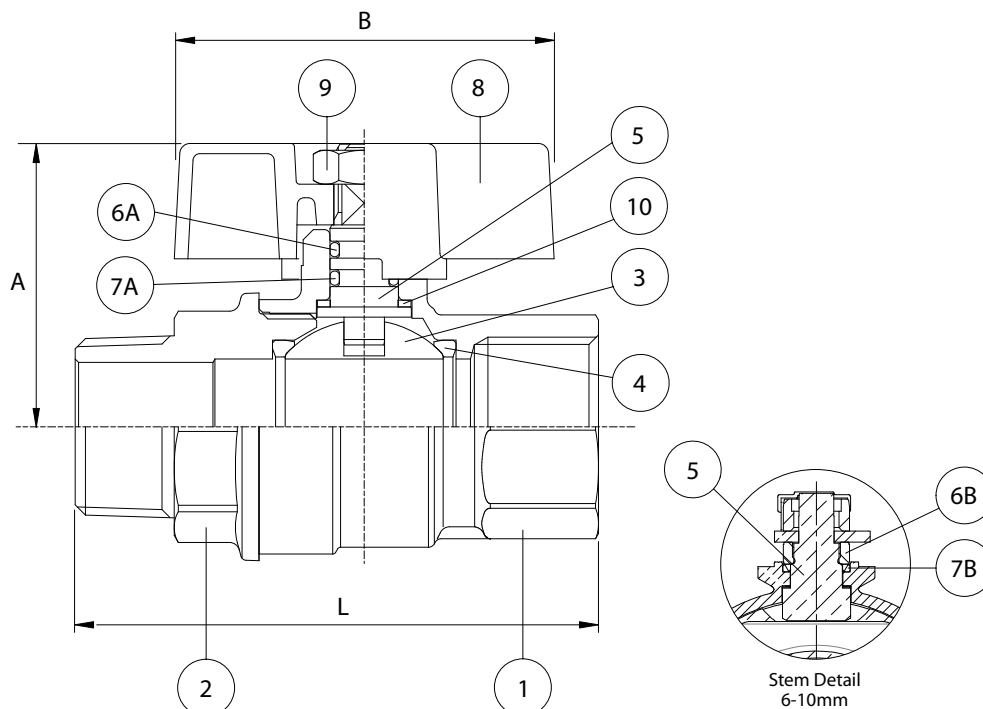

## MATERIALS

POS.	PART NAME	MATERIALS
1	BODY	DZR BRASS
2	END ADAPTOR	DZR BRASS
3	BALL	DZR BRASS (CHROME PLATED)
4	SEAL	PTFE
5	STEM	DZR BRASS
6A	UPPER O-RING	HNBR
7A	LOWER O-RING	EPDM PEROXIDE
6B	GLAND NUT	BRASS
7B	CONICAL SEAL	PTFE
8	HANDLE	POWDER COATED ALUMINIUM
9	NUT	ZINC PLATED STEEL
10	THRUST WASHER	PTFE

## DIMENSIONS - mm

Prod. Code	Size	A	B	L	Kv	Wgt kg
1053006	6	31	47	51	6	0.130
1053010	10	31	47	54	8	0.130
1053015	15	37	47	68	15	0.198
1053020	20	47	56	78	28	0.339
1053025	25	51	56	90	39	0.516

## PRESSURE/TEMPERATURE DIAGRAM

