



Series 1947

Eurostop®
Stainless Steel 316
WaterMarked
Spring Check Valve

FEATURES

MANUFACTURED IN ITALY

WATERMARKED TO AS 1628 LICENCE WM-020106

STAINLESS STEEL 316 INVESTMENT CASTING

MINIMUM HEAD LOSS DUE TO THE STREAMLINED FLOW DESIGN

HEAVY PATTERN DESIGN

EXCELLENT SEAL AT LOW & HIGH PRESSURE, WITHIN A WIDE TEMPERATURE RANGE

NOT SUITABLE FOR SOLAR APPLICATIONS

QUIET OPERATION AND REDUCTION IN WATER HAMMER

WEAR RESISTANT AND LONG LASTING MATERIALS

COMPACT DIMENSIONS, SUPERIOR PERFORMANCE AND HIGH QUALITY

CAN BE INSTALLED IN HORIZONTAL OR VERTICAL POSITION

ALL VALVES PRESSURE TESTED DURING PRODUCTION

SIZE: 15MM

PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -20°C TO 130°C

MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES: 2500 kPa

CRACKING PRESSURE: 2.5 kPa



WaterMark


IAPMO WM-020106
AS 1628

Series 1947

Eurostop® Stainless Steel 316
WaterMarked Spring Check Valve



DIMENSIONAL AND COMPONENT DIAGRAM

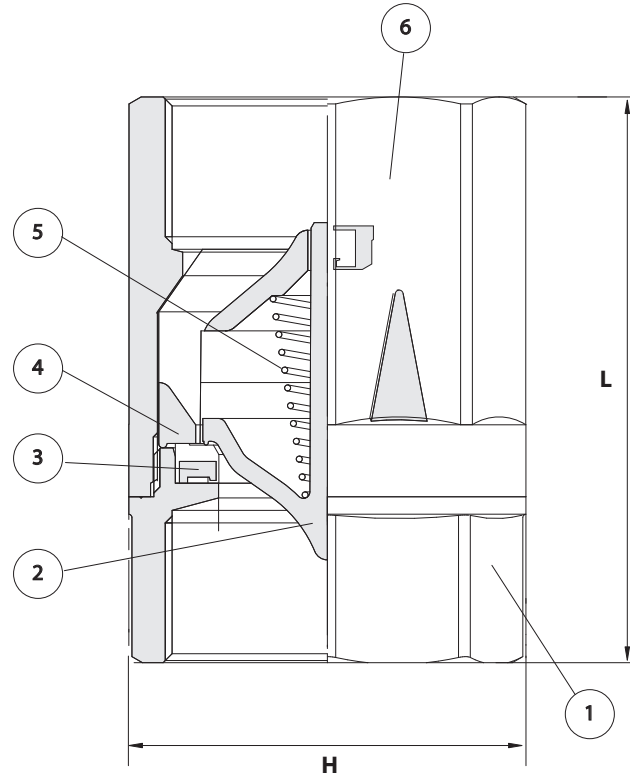

MATERIALS

POS.	PART NAME	MATERIALS
1	ADAPTOR	STAINLESS STEEL 316
2	JUMPER	MOULDED PLASTIC
3	GASKET	VITON®
4	JUMPER GUIDE	MOULDED PLASTIC
5	SPRING	STAINLESS STEEL 316
6	BODY	STAINLESS STEEL 316

DIMENSIONS - mm

Prod. Code	Size	L	H	Kv	Wgt kg
1947015	15	56	34.5	8.4	0.135

PRESSURE/TEMPERATURE DIAGRAM

