



Series 4405

Zetco WaterMarked
2-Piece Stainless Steel
Underground
Ball Valve F&F

FEATURES

MANUFACTURED IN CHINA
STAINLESS STEEL 316 INVESTMENT CASTING
WATERMARKED TO AS 5830.1 LICENCE WM-022438
FITTED WITH ADAPTOR MAKING IT SUITABLE FOR UNDERGROUND INSTALLATION
FULL BORE
BLOW-OUT PROOF STEM
MUST BE OPERATED IN FULLY OPEN OR CLOSED POSITION
ALL VALVES PRESSURE TESTED DURING PRODUCTION
SIZE RANGE: 25MM TO 50MM

PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -20°C TO 150°C
MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES: 4000 kPa
FOR RATINGS AT SPECIFIC TEMPERATURES REFER TO GRAPH OVERLEAF

UNDERGROUND KEY



DESIGNED TO BE OPERATED WITH UNDERGROUND KEY
PRODUCT CODE: 2502000



WaterMark

IAPMO WM-022438
AS 5830.1


Series 4405

Zetco WaterMarked 2-Piece

Stainless Steel Underground Ball Valve F&F



DIMENSIONAL AND COMPONENT DIAGRAM

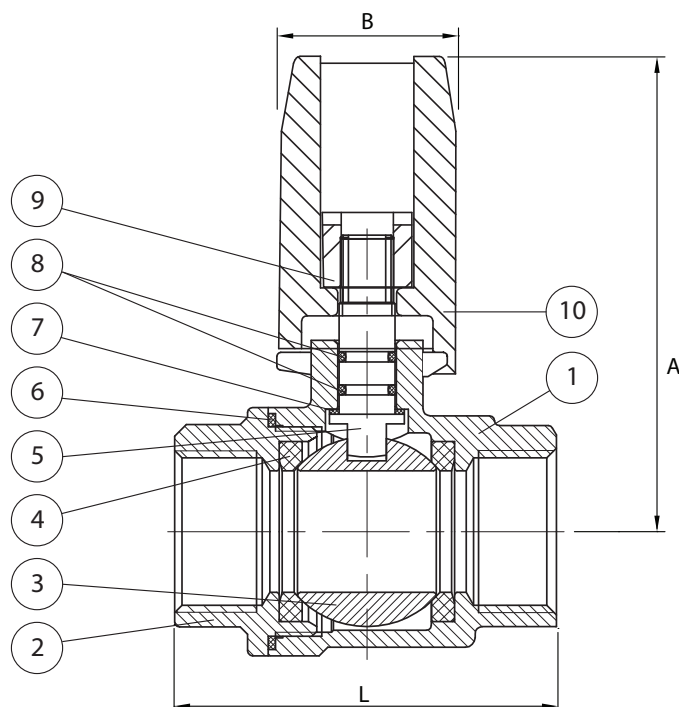

MATERIALS

POS.	PART NAME	MATERIALS
1	BODY	STAINLESS STEEL 316
2	END ADAPTOR	STAINLESS STEEL 316
3	BALL	STAINLESS STEEL 316
4	SEAT	PTFE
5	STEM	STAINLESS STEEL 316
6	GASKET	PTFE
7	THRUST WASHER	PTFE
8	O-RING	VITON®
9	SOCKET	STAINLESS STEEL 304
10	ADAPTOR	STAINLESS STEEL 304

DIMENSIONS - mm

Prod. Code	Size	A	B	L	Kv	Wgt kg
4405025	25	96	27	78	30.0	0.730
4405032	32	100	27	90	39.4	1.19
4405040	40	107	27	104	68.6	1.63
4405050	50	117	27	126	94.3	2.57

PRESSURE/TEMPERATURE DIAGRAM

